

Vibration Test System TV 69440/AIT-480-IRS-315

S 69440/AIT-480 (Example drawing) [mm]

TECHNICAL PARAMETERS

Rated peak force Sine _{pk} /Random ¹ _{RMS} /Shock _{pk} ²	140000/130000/420000 N
Frequency range	5 - 3000 Hz
Main resonance frequency	2400 Hz
Max. displacement Sine/Random/Shock (Pk-Pk) ³	63.5/63.5/76.2 mm
Max. velocity Sine/Random/Shock	2.0/2.0/4.0 m/s
Max. acceleration Sine/Random	200/180 g
Max. acceleration Shock (at payload)	3 ms: 300 g (60 kg) 6 ms: 100 g (240 kg) 11 ms: 100 g (300 kg)
Suspension stiffness	99 N/mm
Effective moving mass	53 kg
Max. payload	610 kg
Magnetic stray field ⁴	< 1.5 mT
Armature diameter	480 mm
Required compressed air supply	Min. 600 kPa
Total mass	5300 kg
Interlocks: Temperature, displacement, water flow rate, overcurrent, compressed air, conductance	

1) Random force according to ISO 5344

2) Theoretical maximum shock value. Depends on payload, amplifier, shock and shock width

3) Impact by moving to static mass and frequency is possible

4) measured at 150 mm above armature inserts




For long-term tests, the load must be reduced to 80 %. Continuous operation at maximum load can cause damage.

SCOPE OF DELIVERY, OPTIONS AND FEATURES OF THE SYSTEM

Scope of delivery:
Vibration exciter S 69440
Trunnion mount with integrated vibration isolation (AIT)
Power amplifier
Field power unit
Cooling unit with integrated hydraulic unit
Connection cables (each 10 m)
Water hoses with self-sealing couplings (each 10 m)
Hydraulic hoses with self-sealing couplings (each 10 m)
Cooling blower
Connection box for blower
Power cable (10 m) for cooling blower (CEE 63 connector)
Blower hose ø175 mm (5 m)
Compressed-air hose NW 7.2 (Standard) (10 m)

Options:
Different hole pattern of armature (different pitch diameter and/or thread inserts) at customers request
Thermo barrier (-40°C to +140°C)
Chamber leadthrough
Climatic chamber support kit
Remote control (Software)
ASM-Mode (Auto-Shutdown-Manager)
Cable/Hose extension
Factory acceptance test
ASG-K - Automatic Rotation System
ERD-Tool - Extended Remote Diagnostic Tool
AIT Resonance System
Low Degauss Kit

Features:
Vibration isolation < 3 Hz (AIT) (with option AITRS 2-3 Hz)
Fully automatic pneumatic load compensation
Low-friction hydrostatic bearing (Dual Bearing)
AIT fixable
Automatic centering of the AIT-System and the armature
Degauss kit to reduce stray magnetic field
Shaker-water circuit with overpressure
Automatic permanent monitoring of conductance
Integrated mains switch and line filter
Energy-saving-mode
4 Sigma peak current
Made in Germany
Servicehotline

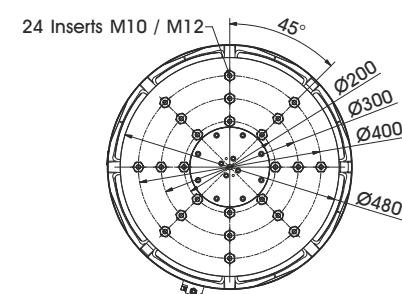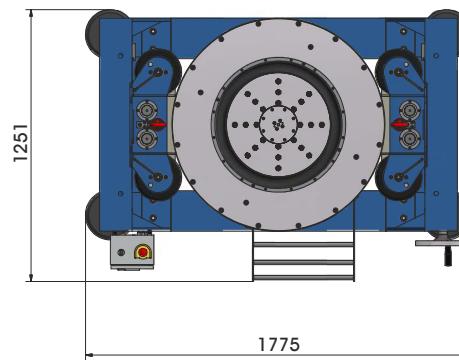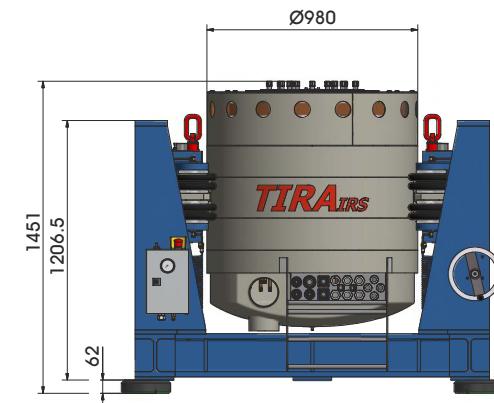

Armature 480 (Standard)

Vibration Test System TV 69440/AIT-480-IRS-315

TECHNICAL PARAMETERS Power Amplifier A 6 00 11 315 + Field power supply

Output power _{RMS} ¹⁾	150000 VA
Frequency range	DC - 5 kHz
Voltage _{RMS} , max.	212 V
Current _{RMS} , max. ¹⁾	1500 A
Signal input voltage _{pk}	±10 V
Total Harmonic Distortion (at 70A _{RMS} , 200 Hz)	< 0.2 %
Signal to noise ratio	> 80 dB
Power supply - Amplifier (Standard)	3~ / N / PE 400 V±5% 50 Hz Direct connection (Terminal block)
Power supply - Field power supply (Standard)	3~ / N / PE 400 V±5% 50 Hz Direct connection (Terminal block)
Max. power consumption at 400 V	285 kVA
Amplifier (incl. cooling unit)	40 kVA
Field power supply	225 A slow
Recommended fuse protection Amplifier (Standard)	125 A slow
Recommended fuse protection FPS (Standard)	2400 x 2200 x 900 mm
Dimensions - Amplifier (WxHxD)	600 x 1740 x 850 mm
Dimensions - Field power supply (WxHxD)	1900 kg
Total mass - Amplifier	500 kg
Total mass - Field power supply	

Interlocks: Overload, Temperature, Displacement, Air supply, Compressed air, Phase monitoring, Emergency stop, Water flow rate, Conductance

Features:
 Mains switch and integrated line filter
 Low/Mid/High-Field (Energy-saving mode)
 Field voltage/Field current variable according to customer spec.
 4 Sigma peak current
 Color-Touchscreen



Amplifier



Field power supply

1) Values in connection with vibration exciter S 69440

TECHNICAL PARAMETERS Cooling unit C 59412

Environmental conditions:	
Temperature	5 - 30 °C
Relative humidity	10 - 80 %
Energy transfer	max. 3 kW
Process water:	
Temperature	5 - 15 °C
Volume flow at max. supply temperature	10 m ³ /h
Working pressure: supply - static	≤ 8 bar (≤ 800 kPa)
Working pressure: dynamic differential pressure	≥ 3 bar (≥ 300 kPa)
Dissipated heat flow	max. 110 kW
Nominal width of supply pipes	R 1 1/2 IT (40 mm)
pH value	7 ± 1
Dimensions of dirt particles	< 25 µm
Water hardness (total/carbonate)	< 1.4 mmol/l / < 0.9 mmol/l
Dimensions (WxHxD)	808 x 2152 x 1092 mm
Total mass	470 kg

TECHNICAL PARAMETERS Cooling blower TB 7/FUK/20

Max. volume flow rate	5820 m ³ /h
Max. total pressure difference	16 kPa
Motor output	20 kW
Max. frequency	105 Hz
Hose diameter	175 mm
Hose length (Std.)	5 m
Total mass	131 kg
Dimensions (WxHxD)	625 x 773 x 602 mm
Max. sound pressure level	105 dB(A)
Connection box (fixation to wall):	
Mass	10 kg
Dimensions (WxHxD)	300 x 300 x 250 mm
Power supply (variable)	3~ / PE 400 V±5% 50 Hz CEE 63
Recommended fuse protection (Standard)	50 A slow
Max.current consumption at 400 V	38 A



Cooling unit C 59412



Cooling blower TB 7/FUK/20 with frequency converter



Connection box with main switch (for blower)